

**MEDIFLOW BASIC  
STAINLESS STEEL AISI 304 SATIN FINISH**

**Code: M03ACS**

**General Description**


- Warm air hand dryer.
- Sensor operated by hand approximation.
- Maximum power and airflow.
- Maximum robustness and vandal-proof.
- Suitable for very high traffic facilities.
- Also in recessed version conform to ADA projection requirements.
- It normally goes along with a soap dispenser.

**Components & Materials**


- Steel one-piece cover satin finish, 1/16" (1.5 mm) thick. Cover fixed to the base by means of 2 vandal-proof lock screws and lock with special mediflow® key wrench.
- Fire resistant plastic PPE+HIPS base and fan scroll, with 4 Ø 5/16" (8 mm) holes for wall mounting. It includes silent-blocks to dampen mechanical vibrations.
- Motor, universal with brushes, 4,500 rpm, A class, includes a temperature limiter.
- Aluminum asymmetrical double inlet fan wheel.
- Fe, Al & Cr taped winding coil filament heating element that incorporates a temperature limiter.
- IR electronic detection sensor with polycarbonate viewing window.

**Technical Specifications**

Voltage	110-120 V	Total power	2,250 W
Frequency	50/ 60 Hz	Motor power	1/3 HP
Electrical isolation	Grounding required	Heating element power	2,000 W
Dimensions	10-3/4"W x 12-5/8"H x 6-1/2"D	Consumption	19 A
Weight	9.37 Lbs.	r.p.m.	4500
Effective airflow	265 CFM	Air temperature (at 4" distance / 70°F)	120 °F
Nominal airflow	318 CFM	Estimated drying time	29 sec
Air velocity	5,195 LFM	Noise level (at 79")	65 dB



10-3/4"  
(272 mm)

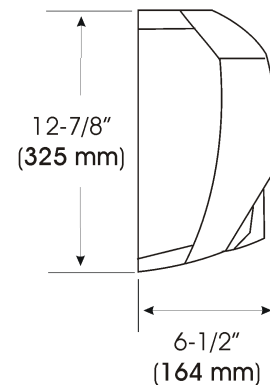

12-7/8"  
(325 mm)

6-1/2"  
(164 mm)

Dim ± 4%

**Operation**

Place the hands under the air outflow valve. The dryer will start automatically, and go on with no interruption as long as the hands are kept in the detection range of the sensor. As a safety measure, the appliance will stop after 120 seconds.


**Installation**

Screws are included. Please refer to [Back](#)


**Certificates & Qualifications**

UL comply with UL499 norm.

## MOUNTING

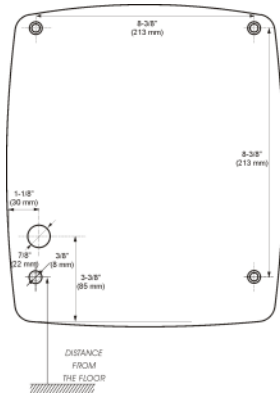

## SERIAL MOUNTING

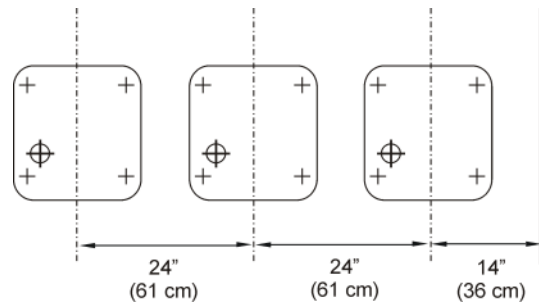


### Nº dryers to be fitted

In toilet areas with a normal frequency of use and only one wash-basin: 1 dryer.  
 In toilet areas with a normal frequency of use and more than one wash-basin: 1 dryer for each 2 wash-basins.  
 1 row of 4 wash basins: 2 dryers; 1 row of 6 wash basins: 3 dryers; 1 row of 8 wash basins: 4 dryers.  
 In toilet areas with high traffic and more than one wash-basin: 2 dryers for each 3 wash-basins.  
 1 row of 4 wash basins: 3 dryers; 1 row of 6 wash basins: 4 dryers; 1 row of 8 wash basins: 5 dryers.

### Ideal location

Between the wash-basin and exit. It is not recommended to install dryer between wash-basins, next to urinals, lavatories and showers. If installing automatic dryers over marble surface or ledge, the minimum distance from the dryer to the ledge must be 15-3/4. It is recommended that hand dryers be distributed throughout the washroom area to avoid overcrowding.

H = Distancia al suelo  
 H = Distance from floor  
 H = Hauteur par rapport au sol  
 H = Abstand vom Boden

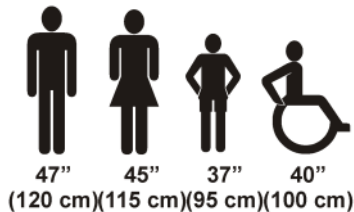

## RECOMENDED HEIGHTS DISTANCE FROM THE FLOOR

### Specification

Surface mounted vandal resistant hand dryer shall be fabricated with one-piece 1/16" thick stainless steel cover, satin finish. The back base shall be fire resistant plastic Noryl V0 and with 4 holes for wall mounting. The dryer shall be activated through an infrared electronic sensor and shall automatically turn off when hands are removed. Sensor shall have a polycarbonate viewing window. Motor shall be 1/3 hp, 4.500 r.p.m. , universal type, class A including a temperature limiter switch off at 248 °F (120°C. ) . The Fe, Al & Cr heating element should incorporate a thermal limiter, which will switch off by a temperature of 230 °F (110°C.). The hand dryer should have an aluminum asymmetrical double inlet fan wheel, and the fan scroll shall be made of a fire resistant plastic Noryl VO. Dryer shall deliver 318 CFM of air at 120 °F (49 °C) and 5,195 LFM velocity during user controlled drying cycle. The dryer shall have a total power of 2,250 Watts with a consumption of 19A. Noise level should be 65 dB. Overall dimensions shall be 10-3/4"W x 12-7/8"H x 6-1/2"D. Unit shall be UL listed, and /or VDE approved and CE marked.

Surface-Mounted Hand Dryer shall be Model M03ACS of Saniflow Corporation, 2655 Le Jeune Road Suite 810, Coral Gables, FL 33134

**Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.**

Revision 04-2004

© SANIFLOW Corp.