DATA SHEET

Kit for recessed machflow®

saniflow corp
a mediclinics company
Hand Dryer Technology At the Leading Edge

KT0009CS

## General Description

- Kit for recessed machflow® hand dryer (hand dryer not included).
- The kit for recessed machflow® makes the machflow® hand dryer suitable for the compliance of the ADAAG norm (US) – that limits to 4" the horizontal projection of the devices installed in bathrooms for public use –, bestowing on that hand dryer the quality of "specific for the disabled".
- Maximum robustness and vandal-proofness.
- Excellent integration and aesthetical level.

## Components & Materials

- Stainless steel AISI 304 kit for recessed Machflow hand dryer (hand dryer not included), satin finish.

- CABINET: made in two welded parts. The dryer mounting areas are fabricated of 20GA 18-8 type AISI304 stainless steel, it includes 4 M5 bolts welded on top of the base plate for fitting of the machflow® hand dryer.
- FRAME: made in 22GA 18-8 type AISI304 stainless steel with 4 screw holes of Ø 1/4" (6,5mm) for mounting on the wall.
- Nuts and bolts for the fitting of the hand dryer to the kit included: 4 nuts DIN 934 M5, 4 washers DIN 9021 M5 and 4 rubber silent blocks 8 x 18mm.

NOTE 1: Machflow hand dryer not included.
NOTE 2: The screws and wall plugs for the mounting of the cabinet to the wall are not included. The use of stainless steel screws is recommended.

## Technical Specifications

| | |
|---|---|
| Cabinet dimensions - 23 3/8" H x 14 3/4" W x 3" D | Rough Wall Opening – 21 5/8" H x 13" W x 3 3/8" D |
| Outer projection from the wall - 3 55/64" | Wall accommodation – 3 3/8" depth |

## Operation

No specific instructions for its use required.

Please mark the selected item

☐ 

code
**KT009**
material
stainless steel
finish
white

☐ 

code
**KT009B**
material
stainless steel
finish
black

☐ 

code
**KT009C**
material
stainless steel
finish
bright

☐ 

code
**KT009CS**
material
stainless steel
finish
satin

Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: 1-877-222-9125 or visit our website at www.saniflowcorp.com
Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · sales@saniflowcorp.com

## Installation

Verify all rough-in dimensions prior to installation and proceed to install according to the dimensions recommended in the figures.

## Guide specification

Kit for recessed machflow® hand dryer (hand dryer not included) consisted in two main parts: a cabinet and a frame. Cabinet should be made in two welded parts. The dryer mounting areas are fabricated of 20GA 18-8 type AISI304 stainless steel, it includes 4 M5 bolts welded on top of the base plate for fitting of the machflow® hand dryer. The frame is made in 22GA 18-8 type AISI304 stainless steel with 4 screw holes of Ø 1/4" (6,5mm) for mounting on the wall. Nuts and bolts for the fitting of the hand dryer to the kit included: 4 nuts DIN 934 M5, 4 washers DIN 9021 M5 and 4 rubber silent blocks 8 x 18mm.

Kit for recessed Machflow® hand dryer should be model KT0009CS, frame in stainless steel AISI 304, satin finish, manufactured by Saniflow Corp., 3325 NW 70th Avenue, Miami, FL 3312, USA.


## Overall dimensions:

KT009-KT009B-KT009C-KT009CS:


23 3/8" H x 14 3/4" W x 3" D.

Weight: 6,6 lbs (3 Kg) without Machflow hand dryer.

## MOUNTING

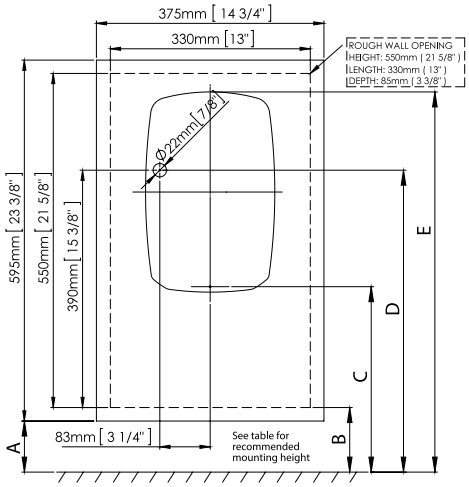



## KT0009CS

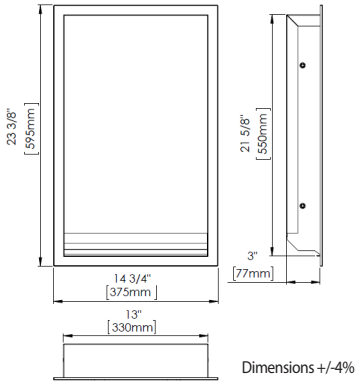


Dimensions +/-4%

## Serial mounting

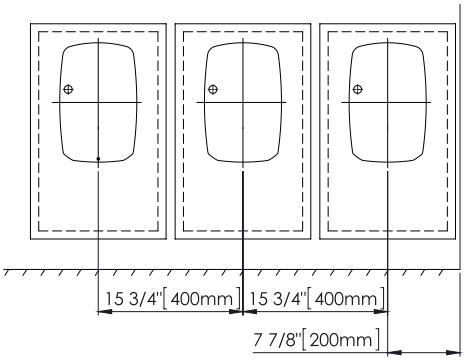


Recommended heights from floor

| | Male | Female | Child | Disabled |
|---|---|---|---|---|
| A To metal frame | 38 7/8" (99cm) | 36 7/8" (94cm) | 29" (74cm) | 31" (79cm) |
| B To wall opening | 39 3/4" (101cm) | 37 3/4" (96cm) | 29 7/8" (76cm) | 31 7/8" (81cm) |
| C To sensor top | 47 5/8" (121cm) | 45 5/8" (116cm) | 37 3/4" (96cm) | 39 3/4" (101cm) |
| D To electrical entry point | 55 1/8" (140cm) | 53 1/8" (135cm) | 45 1/4" (115cm) | 47 1/4" (120cm) |
| E To top of machine | 60 1/4" (153cm) | 58 1/4" (148cm) | 50 3/8" (128cm) | 52 3/8" (133cm) |

Job:

Architect / Engineer:

City / State / Country:

Model number:

Contractor:

Date:

Variations:

Customer / Wholesaler:

Quantity:

Saniflow Corp reserves the right to make changes and/or modifications to the products and their specifications without warning or notice.

For further info please contact SANIFLOW on: Toll free: 1-877-222-9125 or visit our website at www.saniflowcorp.com
Tel: +1 (305) 424 2433 Fax: +1 (305) 424 2435 · sales@saniflowcorp.com